



EDOM/L 350 - 1300

MODELLO	LARGHEZZA TELO	AREA FILTRANTE	PORTATA FANGO <1,2%	ACQUA LAVAGGIO	MOTORE
	mm	m ^q	mc/h	mc/h	Kw
EDOM L	500	4,4	3,8	3,5	0,37
	800	7,4	6,5	5,5	0,75
	1000	9,4	9,5	6,5	0,75
	1200	11,4	13,5	7,5	1,1
	1300	12,4	15	7,5	1,1
MODEL	mm	m ^q	mc/hr	mc/hr	Kw
	BELT WIDTH	FILTERING AREA	SLUDGE CAPACITY	WASHING WATER	POWER



Via G. Pascoli, 1
10060 Scalenghe (TO) Italy
+39.011.246.3456
www.sferasol.com
info@sferasol.com

EDOM/L 350 - 1300

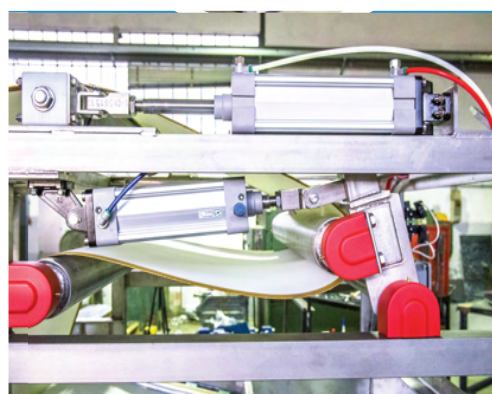

EDOM/L belt press with a pre-gravity dewatering zone and a sludge turnover, in sizes from 500 mm to 1300 mm belts width. This model is particularly apt for sludges with a low solids content (below 1.5% SS) and the limited capacities do not justify the use of a gravity filtering table (**TF**) or a dynamic thickeners (**ROTOSET**).

Achieved capacity increases (with the same belts width) are up to 50% compared to standard **EDOM** belt press, with several percent points increase in cake.

Sferasol
Ecology

Via G. Pascoli, 1
10060 Scalenghe (TO) Italy
+39.011.246.3456
www.sferasol.com
info@sferasol.com